

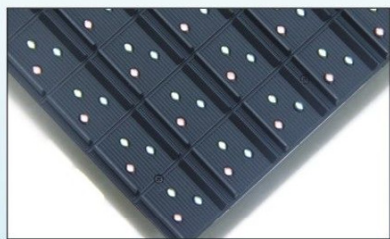


NEW PRODUCT

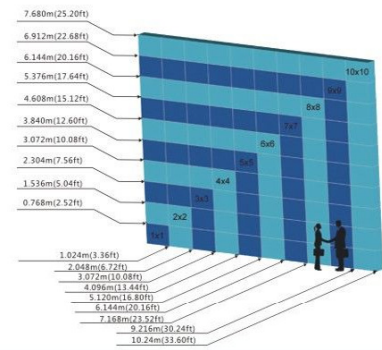

Input source

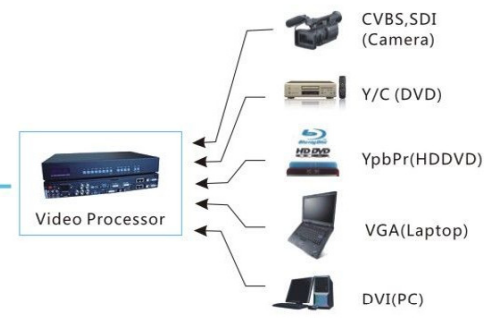

P25 Outdoor Full Color LED DISPLAY



Kosovska 33, 21000 Novi Sad, SERBIA
 Phone: + 381 21 4720 556
 e-mail: info@studioberar.com

www.studioberar.com

- Rental
- Advertisement
- Concerts
- Sports
- Exhibitions

- Extremely Thin Design
- 1R1G1B Pixel Configuration
- With high bright Red LED
- High Viewing Angle
- High Contrast Ratio with a perfect louver/cover
- White Balance: D50 to D93
- Brightness: 6000nits
- Max Power Consumption: 360 W/ M²
- Average Power Consumption: 150 W/ M²
- 110V to 220V Voltage Input
- Constant Current Drive

| Electrical & Optical Performance | | Physical Characteristics | | |
|----------------------------------|-------------------------|--------------------------------|--------------------------|-----------------|
| Panel Brightness | 6000 nits | Cabinet | Weight | 37 kg |
| Color temperature | 6500 deg.K | | Width | 1024 mm |
| Viewing Angle | 120 deg. (+/-60 deg.) | | Height | 768 mm |
| | 60 deg. (+/-30 deg.) | | Depth | 185 mm |
| Wavelength | 623nm | | Pixel pitch | 25.6 mm |
| | 470nm | | Pixel density | 1526 dots/ sq.m |
| Viewing distance | 25~75 meters | Area | 0.786 sq.m | |
| Colors | 10.7 billion | Material | Aluminum | |
| Gray scale | 65536 levels per colour | Environmental | | |
| Brightness control | 100 levels | Temperature | Operating | -20 - +50 deg.C |
| Digital processing | 10 bit | | Operating humidity range | 10% -90% RH |
| Frame rate | 60 Hz | | Storage/transportation | -40 - +60 deg.C |
| Display refresh rate | 500 Hz/4800Hz | Warranty | | |
| Drive mode | Static drive | Ingress protection(Front/Rear) | IP65/IP43 | |
| Input power | 110V-220V @ 50-60 Hz | Lifespan (<50% brightness) | 40000 | |
| Power consumption (max/avg.) | 360/150 W/sq.m | Module brightness uniformity | <5% | |
| | | Earth leakage current | <2 mA | |

